


TENDER DOCUMENT FOR

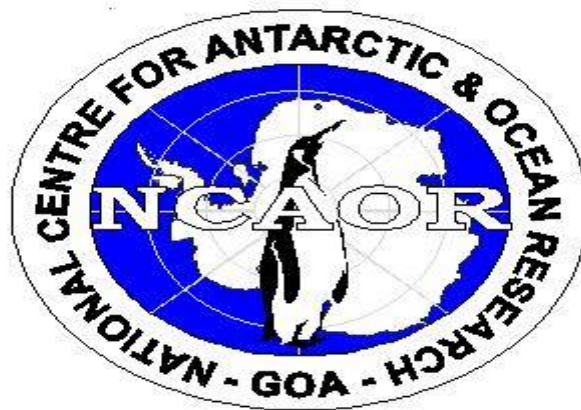

SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS

***NATIONAL CENTRE FOR ANTARCTIC & OCEAN RESEARCH
(Ministry of Earth Sciences, Govt. Of India)***

Headland Sada, Vasco-da-Gama

GOA -403 804, INDIA.

Tel: 91- (0) 832 2525571 Telefax: 91- (0) 832 2525573

Email: warlu62@ncaor.gov.in

Website: www.ncaor.gov.in

NATIONAL CENTRE FOR ANTARCTIC & OCEAN RESEARCH
(Ministry of Earth Sciences, Govt. Of India),
HEADLAND SADA, VASCO-DA-GAMA,
GOA - 403 804

TENDER NO. NCAOR/PR-1322/PT-17
TENDER FOR SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS.

| | | |
|----|--|--|
| 1. | SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS Specifications Quantity | As per Annexures 01 Lot. |
| 2. | General Terms and Conditions | As per Annexure II |
| 3. | Cost of Tender Documents (In Person) | ₹ 2000.00 |
| 4. | Cost of Tender Documents (By Post) | ₹ 2050.00 |
| 5. | EMD | <p>Tender documents can be downloaded by tenderers from NCAOR website. In case a tenderer is using the documents and forms downloaded from the website, the cost of tender documents shall be sent in the form of Bank Draft in a separate envelope along with the tender.</p> <p>Bidders shall submit EMD along with their tender, either by DD drawn in favor of NCAOR, for a sum of ₹ 1, 00,000/- (Rupees One Lakh only) payable at Vasco-da-Gama only.</p> <p style="text-align: center;">Or</p> <p>In the form of a bank guarantee for a sum of ₹ 1,00,000/- (Rupees One Lakh only)</p> |
| 6. | Last Date and time for issue of tender documents | MONDAY 20.06.2016 1600Hrs (IST) |
| 7. | Last Date and time for submission of sealed quotations | TUESDAY 21.06.2016 1700Hrs (IST) |
| 8. | Date and time of tender opening | WEDNESDAY 22.06.2016 1000Hrs (IST) |

SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS

| Sr.No. | Item Description & Specifications | Quantity |
|---------------|--|-----------------|
| 01 | SAP Production Application Server (For Technical Specification refer Annexure-I) | 01 |
| 02 | SAP QA Application Server (For Technical Specification refer Annexure-II) | 01 |
| 03 | SAP DEV Application Server (For Technical Specification refer Annexure-III) | 01 |
| 04 | Backup Server (For Technical Specification refer Annexure-IV) | 01 |
| 05 | SAP HANA DB Server for QA & Dev (For Technical Specification refer Annexure-V) | 01 |
| 06 | SAP HANA DB Server for Production (For Technical Specification refer Annexure-VI) | 01 |
| 07 | Server Rack (For Technical Specification refer Annexure-VII) | 01 |
| | SUPPLY , INSTALLATION AND CONFIGURATION OF ABOVE SERVERS AND RACK (SR.NO. 1 TO 7) | |

| Annexure - I (Application Server for Prod Environment) | |
|---|---|
| Item | Feature description |
| Processors | 2X E5-2630v3 (2.4GHz, 8C) or higher version |
| | Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs |
| Form Factor | Maximum of 2U Rack Server |
| Storage | 2x 1.2 TB 10K |
| | The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives |
| | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 |
| | Should support a write cache of 1 GB for the storage controller |
| | Support for a battery back write cache for the storage controller |
| | Must have an internal slot for SD card / Flash which supports booting hypervisors |
| Memory | 64 GB |
| | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs |
| | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC) |
| Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity |
| | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. |
| PCIe Slots | Up to 6 PCIe Generation 3.0 slots |
| Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local |
| | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems |
| | The server should support Command-line interface (CLI) for server management |
| Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port |
| Others | Supports hot swappable redundant fans |
| | Supports hot swappable redundant power supplies |
| Operating System | SLES SAP; 1-2 CPU or 1-2 VM; 3-Yr |
| Technical Services | Not applicable for non-HANA system |
| Warranty | 3 Years |

Annexure-II

| Annexure - II (Application Server for QA Environment) | |
|--|---|
| Item | Feature description |
| Processors | 2X E5-2630v3 (2,4GHz, 8C) or higher Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs |
| Form Factor | Maximum of 2U Rack Server |
| Storage | 2x 1.2 TB 10K The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 Should support a write cache of 1 GB for the storage controller Support for a battery back write cache for the storage controller Must have an internal slot for SD card / Flash which supports booting hypervisors |
| Memory | 64 GB Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). |
| Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. |
| PCIe Slots | Up to 6 PCIe Generation 3.0 slots |
| Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems The server should support Command-line interface (CLI) for server management |
| Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port |
| Others | Supports hot swappable redundant fans Supports hot swappable redundant power supplies |
| Operating System | SLES SAP; 1-2 CPU or 1-2 VM; 3-Yr |
| Technical Services | Not applicable for non-HANA system |
| Warranty | 3 Years |

| Annexure - III (Application Server for Dev Environment) | |
|--|---|
| Item | Feature description |
| Processors | E5-2630v3 (2,4GHz, 8C) or higher Each server shall have a minimum of one (1) Intel E5-2600 v3 series CPUs |
| Form Factor | Maximum of 2U Rack Server |
| Storage | 2x 1.2 TB 10K The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 Should support a write cache of 1 GB for the storage controller Support for a battery back write cache for the storage controller Must have an internal slot for SD card / Flash which supports booting hypervisors |
| Memory | 32 GB Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). |
| Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. |
| PCIe Slots | Up to 6 PCIe Generation 3.0 slots |
| Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems The server should support Command-line interface (CLI) for server management |
| Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port |
| Others | Supports hot swappable redundant fans Supports hot swappable redundant power supplies |
| Operating System | SLES SAP; 1-2 CPU or 1-2 VM; 3-Yr |
| Technical Services | Not applicable for non-HANA system |
| Warranty | 3 Years |

| Annexure - IV (Backup Server) | |
|-------------------------------|---|
| Item | Feature description |
| Processors | E5-2630v3 (2,4GHz, 8C) or higher |
| | Each server shall have a minimum of one (1) Intel E5-2600 v3 series CPUs |
| Form Factor | Maximum of 2U Rack Server |
| Storage | 4x 1.2 TB 10K RAID1 |
| | The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives |
| | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 |
| | Should support a write cache of 1 GB for the storage controller |
| | Support for a battery back write cache for the storage controller |
| | Must have an internal slot for SD card / Flash which supports booting hypervisors |
| Memory | 16 GB |
| | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs |
| | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). |
| Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity |
| | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. |
| PCIe Slots | Up to 6 PCIe Generation 3.0 slots. |
| Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local |
| | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems |
| | The server should support Command-line interface (CLI) for server management |
| Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port |
| Others | Supports hot swappable redundant fans |
| | Supports hot swappable redundant power supplies |
| Operating System | Windows Server 2012 R2 Standard (2 CPU/2 VMs) |
| Technical Services | Not applicable for non-HANA system |
| Warranty | 3 Years |

Annexure - V (SAP -HANA Server for DEV & QAS Environment)

| Item | Feature description |
|--------------------|---|
| Processors | 2X E5-2699v3 (2.3GHz, 18C) or higher |
| | Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs |
| Form Factor | Maximum of 2U Rack Server |
| Storage | 18 x 600GB 10K |
| | The server should have up to 24 front-accessible, hot-swappable, SAS ,SATA or SSD drives |
| | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 |
| | Should support a write cache of 1 GB for the storage controller |
| | Support for a battery back write cache for the storage controller |
| | Must have an internal slot for SD card / Flash which supports booting hypervisors |
| Memory | 768 GB |
| | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs |
| | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). |
| Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity |
| | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. |
| PCIe Slots | Up to 6 PCIe Generation 3.0 slots |
| Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local |
| | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems |
| | The server should support Command-line interface (CLI) for server management |
| Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port |
| Others | Supports hot swappable redundant fans |
| | Supports hot swappable redundant power supplies |
| Operating System | Latest "Suse Linux Enterprise Edition for SAP" OS version certified for the SAP HANA 3 Year |
| Technical Services | HANA Installation not included |
| Warranty | 3 Years |

Annexure - VI (SAP-HANA-PROD SERVER Environment)

| Item | Feature Description |
|--------------------|---|
| Processors | 2X E5-2699v3 (2.3GHz, 18C) or higher |
| | Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs |
| Form Factor | Maximum of 2U Rack Server |
| Storage | 18x 600GB 10K |
| | The server should have at least 24 front-accessible, hot-swappable, SAS ,SATA or SSD drives |
| | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 |
| | Should support a write cache of 1 GB for the storage controller |
| | Support for a battery back write cache for the storage controller |
| | Must have an internal slot for SD card / Flash which supports booting hypervisors |
| Memory | 768 GB |
| | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs |
| | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC) |
| Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity |
| | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. |
| PCIe Slots | Up to 6 PCIe Generation 3.0 slots |
| Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local |
| | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems |
| | The server should support Command-line interface (CLI) for server management |
| Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port |
| Others | Supports hot swappable redundant fans |
| | Supports hot swappable redundant power supplies |
| Operating System | Latest "Suse Linux Enterprise Edition for SAP" OS version certified for the SAP HANA |
| Technical Services | HANA Installation not included |
| Warranty | 3 Years |

| |
|--|
| Annexure - VII (42U Standard Server Rack) |
|--|

Sl.No

| |
|--|
| Specifications for Server Rack with Wheel (Black color rack only) |
|--|

| | |
|---|---|
| 1 | 42 U Black Color Server Rack with PDU's that can accommodate fully populated rack, with power from two sources (2X24 Outlets) |
| 2 | 19 inch sliding TFT Color Monitor (rack mounted monitor with required cables, keyboard, mouse and touch pad) |
| 3 | 16 port IP based KVM Switch along with required cables |

| | | Compiled or Not |
|--------------|--|-----------------|
| (I) | Delivery & installation | |
| 1 | The delivery and installation site is NCAOR, Goa campus | |
| 2 | The vendor and OEM should undertake full responsibility of on-site supply, installation & integration of the system | |
| 3 | The respective OEM / Vendor engineers must actively participate in the installation along with the system integrator, for which necessary back-to-back arrangements are to be ensured by the Vendor. | |
| 4 | In the technical bid, the list of deliverables/ Bill of Material (BoM) with Part Nos. as applicable must be clearly specified. | |
| 5 | At the time of installation of the system, if it is found that some additional hardware/ software items are required to complete the configuration, which were not included in the vendor's original list of deliverables/ BoMs, then the vendor is required to supply such items to ensure the completeness at no extra cost to NCAOR. Vendor should ensure completeness of the list of deliverables in the offer to avoid such discovery during installation | |
| 6 | Delays in delivery/ installation will attract levy of liquidated damages as per NCAOR rules | |
| (II) | Warranty Technical Support | |
| 1 | The comprehensive on-site warranty shall start from date of successful completion of ATP for a period of 3 years | |
| 2 | The warranty shall include disks, batteries, etc. and supply & installation of updates and upgrades of the software including firmware, OS, management software, etc | |
| 3 | The warranty support from vendor includes reconfigurations, performance optimizations, guidance on usage and software aspects, technical help in planning for augmentations, etc. | |
| 4 | Trained and competent technical expertise for the relevant products must be available for post-installation support | |
| 5 | The vendor should clearly provide escalation matrix for resolving problems | |
| 6 | Failed disks must be replaced with new ones at no extra charges and the faulty disks will not be returned to the vendor as per NCAOR rules. No disk retention charges would be paid. | |
| (III) | Other technical terms & conditions | |
| 1 | The vendor must be a system integrator & authorized partner of the OEM and should provide OEM authorization letter specific to this enquiry | |
| 2 | Documentary evidence proof to be obtained from vendor regarding experience in installing, integrating and supporting similar infrastructures in the last three years for the quoted make along with client contact details. | |
| 3 | The exact make/ brand, model numbers, of the quoted items must be clearly specified. The proposed server should be supported for SAP-HANA and SAP Application Servers. | |
| 4 | All supplied items must be brand new and refurbished items are not acceptable | |

| | | |
|----|---|--|
| 5 | Each item offered shall have a minimum support life of seven years | |
| 6 | Full technical specifications and literature must be provided for all the quoted items in the technical bid | |
| 7 | The vendor must have proven experience in installing, integrating and supporting similar infrastructures in the last three years. Documentary evidence should be furnished. | |
| 8 | The vendor must have skilled, OEM trained and experienced manpower with technical competence on the quoted products to provide warranty support | |
| 9 | Supplied items should work on 220V, 50 Hz, AC power supply | |
| 10 | All power sockets/fixtures at the installation site are Indian type | |
| 11 | If the system requires power sourcing that is different from the standard, vendor shall indicate the same and also provide the necessary adapters | |

**TECHNICAL COMPLIANCE STATEMENT FOR SUPPLY, INSTALLATION AND CONFIGURATION OF
SAP SERVERS**

| Sr.No. | | TECHNICAL COMPLIANCE STATEMENT FOR SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS | COMPLIED/NOT COMPLIED | EXTRA FEATURES |
|--------|-------------|---|-----------------------|----------------|
| 1.0 | | Annexure - I (Application Server for Prod Environment) | | |
| | Item | Feature description | | |
| 1.1 | Processors | 2X E5-2630v3 (2.4GHz, 8C) or higher version Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs | | |
| 1.2 | Form Factor | Maximum of 2U Rack Server | | |
| 1.3 | Storage | 2x 1.2 TB 10K The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 Should support a write cache of 1 GB for the storage controller Support for a battery back write cache for the storage controller Must have an internal slot for SD card / Flash which supports booting hypervisors | | |
| 1.4 | Memory | 64 GB Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs Support for advanced memory redundant technologies like Advanced error-correcting code (ECC) | | |
| 1.5 | Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. | | |
| 1.6 | PCIe Slots | Up to 6 PCIe Generation 3.0 slots | | |
| 1.7 | Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems The server should support Command-line interface (CLI) for server management | | |

| | | | | |
|------|--|---|--|--|
| 1.8 | Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port | | |
| 1.9 | Others | Supports hot swappable redundant fans | | |
| | | Supports hot swappable redundant power supplies | | |
| 1.10 | Operating System | SLES SAP; 1-2 CPU or 1-2 VM; 3-Yr | | |
| 1.11 | Technical Services | Not applicable for non-HANA system | | |
| 1.12 | Warranty | 3 Years | | |
| 2.0 | Annexure - II (Application Server for QA Environment) | | | |
| 2.1 | Item | Feature description | | |
| 2.2 | Processors | 2X E5-2630v3 (2,4GHz, 8C) or higher | | |
| | | Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs | | |
| 2.3 | Form Factor | Maximum of 2U Rack Server | | |
| 2.4 | Storage | 2x 1.2 TB 10K | | |
| | | The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives | | |
| | | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 | | |
| | | Should support a write cache of 1 GB for the storage controller | | |
| | | Support for a battery back write cache for the storage controller | | |
| | | Must have an internal slot for SD card / Flash which supports booting hypervisors | | |
| 2.5 | Memory | 64 GB | | |
| | | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs | | |
| | | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). | | |
| 2.6 | Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity | | |
| | | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. | | |
| 2.7 | PCIe Slots | Up to 6 PCIe Generation 3.0 slots | | |
| 2.8 | Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local | | |
| | | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems | | |
| | | The server should support Command-line interface (CLI) for server management | | |

| 2.9 | Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> • 1 serial port • 2 USB ports • 1 VGA video port | | |
|------|--|---|--|--|
| 2.10 | Others | Supports hot swappable redundant fans | | |
| | | Supports hot swappable redundant power supplies | | |
| 2.11 | Operating System | SLES SAP; 1-2 CPU or 1-2 VM; 3-Yr | | |
| 2.12 | Technical Services | Not applicable for non-HANA system | | |
| 2.13 | Warranty | 3 Years | | |
| 3.0 | Annexure - III (Application Server for Dev Environment) | | | |
| | | | | |
| Item | | Feature description | | |
| 3.1 | Processors | E5-2630v3 (2,4GHz, 8C) or higher | | |
| | | Each server shall have a minimum of one (1) Intel E5-2600 v3 series CPUs | | |
| 3.2 | Form Factor | Maximum of 2U Rack Server | | |
| 3.3 | Storage | 2x 1.2 TB 10K | | |
| | | The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives | | |
| | | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 | | |
| | | Should support a write cache of 1 GB for the storage controller | | |
| | | Support for a battery back write cache for the storage controller | | |
| | | Must have an internal slot for SD card / Flash which supports booting hypervisors | | |
| 3.3 | Memory | 32 GB | | |
| | | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs | | |
| | | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). | | |
| 3.4 | Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity | | |
| | | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. | | |
| 3.5 | PCIe Slots | Up to 6 PCIe Generation 3.0 slots | | |
| 3.6 | Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local | | |
| | | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems | | |
| | | The server should support Command-line interface (CLI) for server management | | |

| | | | | |
|------|--------------------|---|--|--|
| 3.7 | Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port | | |
| 3.8 | Others | Supports hot swappable redundant fans | | |
| | | Supports hot swappable redundant power supplies | | |
| 3.9 | Operating System | SLES SAP; 1-2 CPU or 1-2 VM; 3-Yr | | |
| 3.10 | Technical Services | Not applicable for non-HANA system | | |
| 3.11 | Warranty | 3 Years | | |
| 4.0 | | Annexure - IV (Backup Server) | | |
| | Item | Feature description | | |
| 4.1 | Processors | E5-2630v3 (2,4GHz, 8C) or higher | | |
| | | Each server shall have a minimum of one (1) Intel E5-2600 v3 series CPUs | | |
| 4.2 | Form Factor | Maximum of 2U Rack Server | | |
| 4.3 | Storage | 4x 1.2 TB 10K RAID1 | | |
| | | The server should have 8 front-accessible, hot-swappable, SAS ,SATA or SSD drives | | |
| | | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 | | |
| | | Should support a write cache of 1 GB for the storage controller | | |
| | | Support for a battery back write cache for the storage controller | | |
| | | Must have an internal slot for SD card / Flash which supports booting hypervisors | | |
| 4.4 | Memory | 16 GB | | |
| | | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs | | |
| | | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). | | |
| 4.5 | Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity | | |
| | | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. | | |
| 4.6 | PCIe Slots | Up to 6 PCIe Generation 3.0 slots. | | |
| 4.7 | Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local | | |
| | | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems | | |
| | | The server should support Command-line interface (CLI) for server management | | |
| 4.8 | Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port | | |

| | | | | |
|------|--------------------|---|--|--|
| 4.9 | Others | Supports hot swappable redundant fans | | |
| | | Supports hot swappable redundant power supplies | | |
| 4.10 | Operating System | Windows Server 2012 R2 Standard (2 CPU/2 VMs) | | |
| 4.11 | Technical Services | Not applicable for non-HANA system | | |
| 4.12 | Warranty | 3 Years | | |
| 5.1 | | Annexure - V (SAP -HANA Server for DEV & QAS Environment) | | |
| | Item | Feature description | | |
| 5.2 | Processors | 2X E5-2699v3 (2.3GHz, 18C) or higher Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs | | |
| 5.3 | Form Factor | Maximum of 2U Rack Server | | |
| 5.4 | Storage | 18 x 600GB 10K The server should have up to 24 front-accessible, hot-swappable, SAS ,SATA or SSD drives The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 Should support a write cache of 1 GB for the storage controller Support for a battery back write cache for the storage controller Must have an internal slot for SD card / Flash which supports booting hypervisors | | |
| 5.5 | Memory | 768 GB Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs Support for advanced memory redundant technologies like Advanced error-correcting code (ECC). | | |
| 5.6 | Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. | | |
| 5.7 | PCIe Slots | Up to 6 PCIe Generation 3.0 slots | | |
| 5.8 | Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems The server should support Command-line interface (CLI) for server management | | |
| 5.9 | Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port | | |
| 5.10 | Others | Supports hot swappable redundant fans | | |

| | | | | |
|------|--------------------|---|--|--|
| | | Supports hot swappable redundant power supplies | | |
| 5.11 | Operating System | Latest "Suse Linux Enterprise Edition for SAP" OS version certified for the SAP HANA 3 Year | | |
| 5.12 | Technical Services | HANA Installation not included | | |
| 5.13 | Warranty | 3 Years | | |
| 6.0 | | Annexure - VI (SAP-HANA-PROD SERVER Environment) | | |
| | Item | Feature Description | | |
| 6.1 | Processors | 2X E5-2699v3 (2.3GHz, 18C) or higher | | |
| | | Each server shall have a minimum of two (2) Intel E5-2600 v3 series CPUs | | |
| 6.2 | Form Factor | Maximum of 2U Rack Server | | |
| 6.3 | Storage | 18x 600GB 10K | | |
| | | The server should have at least 24 front-accessible, hot-swappable, SAS ,SATA or SSD drives | | |
| | | The Server RAID controller should support the following configurations RAID 0, 1, 5, 6, 10, 50, and 60 | | |
| | | Should support a write cache of 1 GB for the storage controller | | |
| | | Support for a battery back write cache for the storage controller | | |
| | | Must have an internal slot for SD card / Flash which supports booting hypervisors | | |
| 6.4 | Memory | 768 GB | | |
| | | Should have at least 24 DIMM slots for up to 768 GB of DDR3 memory using 32 GB DIMMs | | |
| | | Support for advanced memory redundant technologies like Advanced error-correcting code (ECC) | | |
| 6.5 | Network | Should have 2 * 1 GbE LAN on Motherboard (LOM) for network connectivity | | |
| | | The server should support the technology of 40 Gbps network adapter in any combination adding upto minimum of 40 Gbps, which aggregates both the Ethernet and FC connectivity on a single controller using Low-latency, 10-Gbps Ethernet and industry-standard Fibre Channel over Ethernet (FCoE) fabric. | | |
| 6.6 | PCIe Slots | Up to 6 PCIe Generation 3.0 slots | | |
| 6.7 | Management | The integrated management controller should support web user interface for server management; remote keyboard, video, and mouse (KVM); virtual media; and administration with Virtual media support for remote KVM and CD and DVD drives as if local | | |
| | | The server should support Intelligent Platform Management Interface (IPMI) 2.0 or equivalent support for out-of-band management through third-party enterprise management systems | | |
| | | The server should support Command-line interface (CLI) for server management | | |
| 6.8 | Ports | Should have the following ports for server connectivity <ul style="list-style-type: none"> ● 1 serial port ● 2 USB ports ● 1 VGA video port | | |
| 6.9 | Others | Supports hot swappable redundant fans | | |
| | | Supports hot swappable redundant power supplies | | |
| 6.10 | Operating | Latest "Suse Linux Enterprise Edition for SAP" OS version | | |

| | | | | |
|--|--|--------------------------------|--|--|
| | System | certified for the SAP HANA | | |
| 6.11 | Technical Services | HANA Installation not included | | |
| 6.12 | Warranty | 3 Years | | |
| Annexure - VII (42U Standard Server Rack) | | | | |
| Specifications for Server Rack with Wheel (Black color rack only) | | | | |
| 1 | 42 U Black Color Server Rack with PDU's that can accommodate fully populated rack, with power from two sources (2X24 Outlets) | | | |
| 2 | 19 inch sliding TFT Color Monitor (rack mounted monitor with required cables, keyboard, mouse and touch pad) | | | |
| 3 | 16 port IP based KVM Switch along with required cables | | | |
| (I) | Delivery & installation | | | |
| 1 | The delivery and installation site is NCAOR, Goa campus | | | |
| 2 | The vendor and OEM should undertake full responsibility of on-site supply, installation & integration of the system | | | |
| 3 | The respective OEM / Vendor engineers must actively participate in the installation along with the system integrator, for which necessary back-to-back arrangements are to be ensured by the Vendor. | | | |
| 4 | In the technical bid, the list of deliverables/ Bill of Material (BoM) with Part Nos. as applicable must be clearly specified. | | | |
| 5 | At the time of installation of the system, if it is found that some additional hardware/ software items are required to complete the configuration, which were not included in the vendor's original list of deliverables/ BoMs, then the vendor is required to supply such items to ensure the completeness at no extra cost to NCAOR. Vendor should ensure completeness of the list of deliverables in the offer to avoid such discovery during installation | | | |
| 6 | Delays in delivery/ installation will attract levy of liquidated damages as per NCAOR rules | | | |
| (II) | Warranty Technical Support | | | |
| 1 | The comprehensive on-site warranty shall start from date of successful completion of ATP for a period of 3 years | | | |
| 2 | The warranty shall include disks, batteries, etc. and supply & installation of updates and upgrades of the software including firmware, OS, management software, etc | | | |
| 3 | The warranty support from vendor includes reconfigurations, performance optimizations, guidance on usage and software aspects, technical help in planning for augmentations, etc. | | | |
| 4 | Trained and competent technical expertise for the relevant products must be available for post-installation support | | | |
| 5 | The vendor should clearly provide escalation matrix for resolving problems | | | |
| 6 | Failed disks must be replaced with new ones at no extra charges and the faulty disks will not be returned to the vendor as per NCAOR rules. No disk retention charges would be paid. | | | |
| (III) | Other technical terms & conditions | | | |
| 1 | The vendor must be a system integrator & authorized partner of the OEM and should provide OEM authorization letter specific to this enquiry | | | |
| 2 | Documentary evidence proof to be obtained from vendor regarding experience in installing, integrating and supporting similar infrastructures in the last three years for the quoted make along with client contact details. | | | |
| 3 | The exact make/ brand, model numbers, of the quoted items must be | | | |

| | | | |
|----|---|--|--|
| | clearly specified. The proposed server should be supported for SAP-HANA and SAP Application Servers. | | |
| 4 | All supplied items must be brand new and refurbished items are not acceptable | | |
| 5 | Each item offered shall have a minimum support life of seven years | | |
| 6 | Full technical specifications and literature must be provided for all the quoted items in the technical bid | | |
| 7 | The vendor must have proven experience in installing, integrating and supporting similar infrastructures in the last three years. Documentary evidence should be furnished. | | |
| 8 | The vendor must have skilled, OEM trained and experienced manpower with technical competence on the quoted products to provide warranty support | | |
| 9 | Supplied items should work on 220V, 50 Hz, AC power supply | | |
| 10 | All power sockets/fixtures at the installation site are Indian type | | |
| 11 | If the system requires power sourcing that is different from the standard, vendor shall indicate the same and also provide the necessary adapters | | |

TERMS AND CONDITIONS FOR SUBMISSION OF QUOTATION

1) The National Centre for Antarctic and Ocean Research (NCAOR) invites sealed quotations in two-parts from the reputed firms for the **"SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS"** as per the specifications given in Annexure-I.

2) The technical and financial bids should be submitted in two separate sealed covers, super scribing "Part -I Technical Bid for **"SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS"**, Tender No., due date and "Part-II Financial bid for **"SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS"**, Tender No., due date. Both the bids should be kept in a single cover by super scribing tender for **"SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS"**, sealed and addressed to the **Director, National Centre for Antarctic & Ocean Research, Headland-Sada, Vasco-da-Gama, Goa - 403 804**. Offer sent through fax will not be accepted.

3) Overwriting and corrections should be attested properly. The bid should be complete in all respects and should be duly signed. **Incomplete and unsigned bids will not be considered at all.**

4) All relevant technical literature pertain to items quoted **with full specifications** (Drawing, if any), information about the products quoted, including brochures if any should accompany the quotation.

5) A list of **reputed clients** to whom the firm has supplied similar items to be furnished along-with the quotation.

In the TECHNICAL BID, the Bidder should furnish the Name and address of the Purchasers placed orders on similar equipment with order No, date, Description and quantity, Date of Supply alongwith Contact person Telephone No, Fax No, and e mail address of Purchaser.

The Bidder should enclose copies of Purchase Orders only in the FINANCIAL BID.

6) Quotation should be **valid for a period of 120 days** from the date of tender opening and the period of delivery required should also be clearly indicated. If the supplier fails to deliver the goods within the time to be agreed upon, for delayed deliveries and for delays in installation (wherever applicable). NCAOR reserves the right to **levy liquidated damages** at the rate of 0.5% per week or part their of up to maximum of 5%.

7) The **warranty period** and the kind of **post-warranty support** should be indicated. Warranty shall commence from the date of installation and acceptance of the complete equipment supplied under the Purchase Order / Contract.

8) **Technical bid should contain EMD.**

Bidders shall submit **EMD** along with their tender, **either By DD** drawn in favor of NCAOR, on any nationalized bank for a sum of ` 1,00,000/- (Rupees One Lakh only) payable at Vasco-da-Gama only **or in the form of a bank guarantee** for a sum of ` 1,00,000/- (Rupees One Lakh only) from any reputed bank (scheduled bank) initially valid for 180 days from the date of closing of the tender as per the proforma enclosed. This bank Guarantee in original shall be submitted along with the technical bid only.

Tender without EMD in the envelope containing technical bid shall be summarily rejected. The EMD of unsuccessful bidders shall be returned within 30 days of the award of contract.

The earnest money will be liable to be forfeited, if the tenderer withdraws or amends, impairs or derogates from the tender in any respect within the period of validity of his tender.

9) Please **specify the Make/Brand** and Name of the Manufacturer with address, country of origin and currency in which rates are quoted.

10) The Purchaser requires that the bidders suppliers and contractors observe the highest standard of ethics during the procurement and execution of such contracts. In pursuit of this policy, the following are defined:

“Corrupt practice” means the offering, giving, receiving, or soliciting, directly or indirectly, of anything of value to influence the action of a public official in the procurement process or in contract execution:

“fraudulent practice” means a misrepresentation or omission of facts in order to influence a procurement process or the execution of contract;

“collusive practice” means a scheme or arrangement between two or more bidders, with or without the knowledge of purchaser, designed to establish bid prices at artificial, noncompetitive levels; and

“coercive practice: means harming or threatening to harm, directly or indirectly, persons or their property to influence their participation in the procurement process or affect the execution of contract;

The purchaser will reject a proposal for award if it determines that the Bidder recommended for award has, directly or through an agent, engaged in corrupt, fraudulent, collusive or coercive practices in competing for the contract in question; The Decision of Director, NCAOR shall be final and binding.

11) Bidders that doesn't manufacture the goods it offers to supply shall submit Manufacturer's Authorization form on the letterhead of the Manufacturer duly signed and stamped by a person with the proper authority to sign documents that are binding on the Manufacturer as per the following format should be submitted failing which the quotation will not be considered.

To
The Director
NCAOR
GOA

Sub: Manufacturers' Authorization form against Tender No:_____

We_____ (Name of the Manufacturer) who are official manufacturers of _____ (Type of goods manufactured) having factories at _____ (full address of Manufacturer's factories) do hereby authorize _____ (Name of the Bidder) to submit a bid against your Tender No. _____ for the _____ Goods manufactured by us and to subsequently negotiate and sign the contract.

We hereby extend our full guarantee and warranty with respect to the Goods offered by the above firm

Manufacturer's Name:
Signature of Authorized
representative of the Manufacturer:

Duly authorized to sign this Authorization on behalf of : _____ (Name of the Bidder)

Date:

In case the bidder not doing business within India, shall furnish the certificate to the effect that the bidder is or will be represented by an agent in India equipped and able to carry out the supply, maintenance, repair obligations etc., during the warranty and post warranty period or ensure a mechanism at place for carrying out the supply, maintenance, repair obligations etc., during the warranty and post- warranty period.

12) The order acknowledgement should be from the principals and if the Indian Agent is empowered to quote and to furnish order acknowledgement, a copy of agreement entered by you with the Indian Agent to be furnished.

13) Compliance Statement: Equipments point-by-point comparison/compliance statement with **technical specification** indicated in the tender, should be enclosed along with your tender as well as any other extra features of the equipment be shown separately therein and also **compliance statement for all commercial terms** of the tender document.

14) NCAOR is not entitled to issue form **"C/D"**. No Sales Tax or any other Tax shall be payable by us unless payment of the same is specifically mentioned by the suppliers in their bids and same is legally leviable.

15) To avail duty concessions i.e. **Excise Duty** as per Govt. notification 10/97 & **Custom Duty** as per Govt. notification 51/96, NCAOR will provide exemption certificates. Hence, the rates should be split into basic cost and Excise Duty if any.

16) **Technical Bid should contain** all details and specifications of the equipment offered, delivery schedule, warranty, payment term, installation, post-warranty, user-list, service support **WITHOUT PRICE** and **Financial bid should contain** details of the price(s) of the item(s) quoted in the technical bid. The Technical bid should not contain any references to the pricing.

In case the technical bid contains any direct or indirect reference to quoted price the bid is liable to be rejected.

The Prices shall be quoted in Indian Rupees for offers received for supply within India.

For Goods manufactured in India:

F.O.R GOA price should be indicated. However tender should contain item-wise prices including total ex-works price, Excise Duty, VAT/Taxes, Charges for Inland Transportation, Insurance and other local services required for the delivering the goods on F.O.R GOA.

17) A Committee constituted by the Director, NCAOR for the purpose reserves the right to open the bids. Only technical bids will be opened on the date and time mentioned in the tender document. The financial bids of those tenderers whose technical bids are found to be meeting our specifications only will be opened in their presence at date and time to be notified later.

18) The firm to the full satisfaction of the NCAOR should carry out the **installation and commissioning** at the NCAOR premises and the time-frame for the whole process should be specified in the technical bid.

19) A technical Committee constituted by the Director will assess the product supplied/installed for their quality and their conformity to the specifications provided by the firm in their quotations. Any item(s) identified by the Committee to be not as per the specifications or are found to be of inferior quality will be rejected, and the bills towards the supply will not be processed for payment till proper replacements are provided.

20) **No advance payment** will be made. Payment for indigenous stores shall be made within 30 days from the date of receipt, acceptance and satisfactory installation of equipment. The payment will be authorized after submission of a Bank Guarantee for 10% value of the order towards warranty guarantee. The **performance Bank Guarantee** should be furnished within 15 days from the date of placement of order from a reputed bank (scheduled bank in India **or** foreign bank operating in India) valid till 60 days after the warranty period.

21) Suppliers should clearly define the mechanisms of **post-warranty** maintenance or support. Supplier should undertake to support the product for a minimum period of 5 years (post-warranty). Post Warranty, AMC charges for a period of 3 years (annual bases) should also be quoted separately in the financial bid.

22) If the quoted item needs to be imported then the undertaking needs to be produced from the original supplier stating that Post Warranty support for a minimum period of 7 years will be provided from the original supplier to NCAOR on LC Terms of payment. If payment needs to be made and **spares will be supplied on the lowest rate quoted** than to any other customer with providing the sales price list to the NCAOR periodically as and when increase/decrease in prices.

23) Two sets of operational, service/troubleshooting manuals and diagrams to be supplied with **"SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS"**.

24) **The submission of tender** shall be deemed to be an admission on the part of the tenderer, had fully acquainted with the specifications, drawings etc. and no claim other than what stated in the tender shall be paid in the event of award of Purchase Order.

25) Expenditure involved towards any extra materials required for labour involved for successful installation of the equipment, if not quoted for, would have to be borne by the tenderer.

26) **Acceptance of this tender** form and submission of the quote within the stipulated time would be treated as:

a) The tenderer has understood all requirements as described in our Tender document.

b) Acceptance to provide/establish all the facilities mentioned in our tender without any price escalation, if the tenderer finds it necessary to add any hardware or software or any other materials during implementation.

c) Agreeing to execute order to the satisfaction of NCAOR or its authorized representatives within the stipulated time.

27) Installation charges should be clearly indicated.

28) Tender should clearly define the **infrastructure facilities required** for installation of the equipment.

29) NCAOR will not be liable for any obligation until such time NCAOR has communicated to the successful bidder of its decision to release the Purchase Order.

30) NCAOR will not be responsible for any postal delays.

31) Bidders shall note that NCAOR will not entertain any correspondence or queries on the status of the offers received against this Tender Invitation.

32) Tenders from Manufacturers/Suppliers/Tenderers whose performance was not satisfactory in respect of quality of supplies and delivery schedules in any organizations, are liable for rejection. The tenders that do not comply with the above criteria and other terms & conditions are liable for rejection.

33) The Director, NCAOR does not bind to accept the lowest quotation and reserves the right to himself, to reject or partly accept any or all the quotations received without assigning any reason.

34) All disputes arising in connection with executing the purchase order will be subject to the Jurisdiction of the Courts in Goa only.

QUESTIONNAIRE

- a. Name of the Manufacturer / Tenderer.
- b. Full postal address with Telephone, Telefax, Email.
- c. Please specify whether Public Limited, Company, Private Organization or Partnership Firm.
- d. Nature of the Business.
- e. Date of Establishment.
- f. Present Turnover.
- g. Permanent Income Tax Ref. No.
- h. C.S.T. / S.T. NO.
- i. Address & Telephone Nos. Of your branch office in GOA (please specify whether Distributing/Servicing/Marketing the products).
- j. Technical Compliance statement.
- k. Reference of reputed Customers.
- l. Details of the highest order executed and value thereof.
- m. Authorization from Manufacturer/Supplier attached.
- n. Tender fee submitted/enclosed.
- o. E.M.D. attached with TECHNICAL BID.
- p. Infrastructure facilities required for installation & commissioning attached.
- q. Technical Specifications/Literature/Brochure attached.
- r. Tender Acceptance.

TENDER ACCEPTANCE UNDERTAKING

To

The Director,
NCAOR, Headland Sada,
Vasco – Goa.

Having examined the tender document for **“SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS”** we the undersigned hereby offer to supply the equipment in conformity with all specifications and conditions set out in the tender document.

We enclosed all the relevant documents as per the tender.

We understand that you are not bound to accept the lowest or any tender received.

Date :

(Signature of Bidder)

Name :

Designation :

Seal

BANK GUARANTEE FORMAT FOR FURNISHING EMD

To

NATIONAL CENTRE FOR ANTARCTIC & OCEAN RESEARCH
Headland Sada, Vasco-da-Gama, GOA 403 804, INDIA

Whereas _____
(Hereinafter called the "tenderer"
has submitted their offer dated _____
for the supply of _____
(Herein after called the "tender"

WE _____ of having our registered office
At _____ are bound unto the NATIONAL
(Hereinafter called the Bank)

CENTRE FOR ANTARCTIC & OCEAN RESEARCH, Ministry of Earth Sciences, Govt. Of India having its office at Headland Sada, Vasco Goa 403 804, India (herein after called NCAOR which expression shall unless repugnant to the context or meaning thereof include all its successors, administrators, executors and assigns) in the sum of _____ for which payment will and truly to be made to. NCAOR, the Bank binds itself, its successors and assigns by these presents. Sealed with the common seal of the said Bank this _____ day of _____ 2016.

THE CONDITIONS OF THIS OBLIGATION ARE:

- 1) If the tenderer withdraws or amends, impairs or derogates from the tender in any respect within the period of validity of this tender.
- 2) If the tenderer having been notified of the acceptance of his tender by NCAOR during the period of its validity.
 - 2.a) If the tenderer fails to furnish the Performance security for the due performance of the contract.
 - 2.b) Fails or refuses to execute the contract

We undertake to pay NCAOR up to the above amount upon receipt of its first written demand, without NCAOR having to substantiate its demand, provided that in its demand the NCAOR will note that the amount claimed by it is due to it owing to the occurrence of one or both the two conditions, specifying the occurred condition or conditions.

This guarantee is valid until the _____ day of _____ 2016.

Signature of the bank

NATIONAL CENTRE FOR ANTARCTIC & OCEAN RESEARCH
 (Ministry of Earth Sciences, Govt. Of India)
 Headland Sada, Vasco-da-Gama GOA 403 804, INDIA
 Tel: 91- (0) 832 2525571 Telefax: 91- (0) 832 2525573
 Email: warlu62@ncaor.gov.in Website: www.ncaor.gov.in

PUBLIC TENDER

Director, National Centre for Antarctic & Ocean Research (NCAOR) invites sealed tenders in two-parts (part I – Technical bid & part II Financial bid) super scribing Tender No. Item and due date from well established/ reputed manufacturers / authorized and bonafide vendors for supply of the following:-

| Sl. No. | Tender No. | Item Description | Qty. | Cost of Tender Doc. | EMD |
|---------|---------------------|---|--------|---------------------|-------------|
| | | | | .. | .. |
| 01 | NCAOR/PR-1322/PT-17 | SUPPLY, INSTALLATION AND CONFIGURATION OF SAP SERVERS | 01 Lot | 2000.00 | 1,00,000.00 |

Last date for issue of tender documents : **20.06.2016**

Last date for submission of quotation : **21.06.2016**

The details of tender documents are also available in our website <http://www.ncaor.gov.in> and Central Public Procurement Portal <http://eprocure.gov.in>. Interested suppliers may download the details and submit the quotation on or before the due date along with tender fee.

The quotation without tender fee will not be considered.

Tender forms can be obtained from the Procurement section of NCAOR on all working days either by post or in person between 1000 – 1600 hours on payment of tender fees in the form of crossed Demand Draft payable at Vasco-da-gama only, from a Nationalized bank drawn in favor of **NCAOR** along with separate requisition indicating tender number and item. Tender forms can be obtained by speed post by remitting Rs. 50.00 by Indian bidders and US\$ 15.00 by Foreign bidders in addition to the cost of tender documents.

The Director, NCAOR is not responsible for any transitional/postal delays.

The quotations will be **opened on 22.06.2016** in the presence of tenderers or their authorized representatives.

The Director, NCAOR reserves the right to accept or reject any quotation in full or part thereof without assigning any reason.

Sd/-
For & on behalf of NCAOR